

SWIFT 12 Volt sprayers

- All tanks are made of tough, transparent, UV stabilised synthetic materials.
- Contents indicator moulded into the tank wall.
- Built-in carry handles ease lifting and handling.
- Pump and controls well protected by the tank.
- ABB for flat-bottomed tanks. To minimise residues, the Active Bulging Base tank allows the bottom to pop up when it is almost empty.
- All feature a reliable diaphragm pump.



Swift Compact series

- Compact 12 volt sprayer.
- Flat bottom with ABB sump.
- Flow demand pump.
- 6 metre hose with 700 mm lance.
- 25, 50 & 100 litre tanks.



Swift Bike series

- Economic unit that fits most quad bikes.
- Wide low profile allowing more room for the user.
- Built-in hose wrap.
- Flow demand pump.
- 6 metre hose with 700 mm lance.
- 75 litre tank.



Swift Pro & Pro Bike series

- For pick-up and quad bikes.
- Wide, low profile for extra stability.
- Built-in attachments for hose wrap.
- 6 metre hose with S60 spray gun.
- Standard with suction filter, controls & gauge.
- 50 (SP) & 75 (SPB) litre tank with tie straps.




■ **Convenient & reliable for professionals and hobby**



Professional Swift Pro features

1. Bowl type suction filter for easy inspection and service. 50 mesh filter standard.
2. High capacity pump permitting a wider range of uses.
3. Pressure regulator and glycerine dampened pressure gauge for greater control over the tasks.
4. Control unit with bypass return of liquid to tank. This increases agitation and reduces chemical sedimentation.
5. Power ON/OFF switch and fuse.
6. Heavy duty spray gun with adjustable spray pattern.

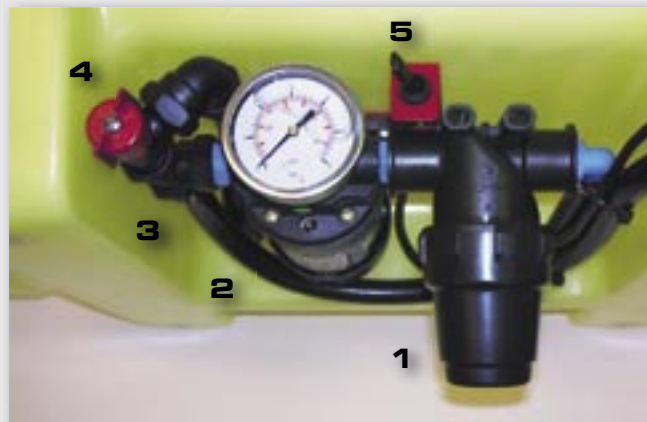

Hobby Swift Compact features

5. Power ON/OFF switch and fuse.
7. Flow activated (demand) pump for prolonged battery life.
8. Trigger valve and lance with reinforced hose. Pressure filter incorporated in trigger valve.



Optional equipment

Two metre boom with SNAP-FIT nozzles.

Model	SC-25	SC-50	SC-100	SB-75	SP-50	SPB-75
HARDI reference no.	846264	846265	846266	846267	846268	846269
Length mm	520	590	800	860	750	860
Bredde, mm	300	370	390	960	450	960
Height, mm	280	350	470	290	300	290
Weight (empty), kg	4.0	7.0	12.0	9.5	N/A	10.0
Tank capacity L	25	50	100	75	50	75
Flow max. L/min	3.8	3.8	3.8	3.8	8.0	8.0
Pressure max. bar	2.4	2.4	2.4	2.4	4.0	4.0
Pressure regulation	Demand	Demand	Demand	Demand	Adjustable	Adjustable
Pump model	LF-14	LF-14	LF-14	LF-14	848	848
Spray lance or gun	Lance	Lance	Lance	Lance	Gun	Gun
Volume, m ³	0.0436	0.0764	0.1466	0.2394	0.1013	0.2394

HARDI INTERNATIONAL A/s
 HELGESHØJ ALLÉ 38 • DK 2630 TAASTRUP • DENMARK
 E-Mail: hardi@hardi-International.com • www.hardi-International.com



HARDI reserves the right to change specifications without notice.
 Illustrations shown may include optional equipment and accessories.